



System Vision 10AS flowtech™100 MS

SKU: V10AS-FTMS

System Vision 10AS with flowtech®100
carbon fibre tripod, carbon fibre mid-level
spreader and rubber feet



PRODUCT DESCRIPTION

Vision 10AS system with flowtech®100 carbon fibre tripod, carbon fibre mid-level spreader and rubber feet.

The Vision 10AS system with flowtech®100 carbon fibre tripod and mid-level spreader, is a professional tripod system designed for camera setups weighing between 6.5-17 kg / 14.3-37.5 lb.

The Vision 10AS has been designed with intuitive controls, side load system for rapid camera attachment and durable brakes. Combined with Vinten's Perfect Balance and LF drag technology, this makes the Vision 10AS the ideal tool for a wide range of challenging, professional applications.

Performance tested in extreme conditions, the unique flowtech®100 is easier and faster to deploy and adjust than any other tripod, giving the camera operator ultimate versatility and improving their workflow.

A unique, heavy duty carbon fibre mid-level spreader with 4 locking positions controlled by a central lock for fast repositioning is included with the flowtech®100. The system is completed with a comfortable carry handle and soft case for protection during transport.

Key Features and Benefits:

Vision 10AS

- Perfect balance for effortless production
- Lubricated Friction fluid drag control ensures smooth movement
- High contrast blue LED levelling bubble for quick, precise set up
- Ergonomic design of all controls for effortless use
- Superior performance, year after year

flowtech®100

- Unique quick release brakes - deploy and adjust your tripod in an instant
- New ergonomic carbon fibre leg design - easy to transport and exceptional torsional stiffness
- Versatile hinge lock mechanism - capture extremely low and high shots
- Extensive endurance and environmental testing - superior performance and reliability

Mid-level Spreader

- 4 locking positions offer very small footprint in narrow spaces and very stable setup on uneven terrain

- Central lock enables fast repositioning
- Fast and simple setup

TECHNICAL SPECIFICATIONS


Height Without Spreader	40 cm to 170 cm 15.75 in to 66.93 in
Range	Vision
Counterbalance	Perfect Balance infinitely adjustable spring balance
Payload	6.5 kg to 17 kg 14.33 lb to 37.48 lb
Material	Carbon Fibre
Weight	7.3 kg 16.09 lb
Drag	LF Drag System
Bowl size	100 mm
Tripod Stages	2
Application	Commercial/Corporate, Documentaries, News
Operating Temperature	-15 °C to 30 °C 5 °F to 86 °F
Interface Compatibility	Ball
Transport Length	85 cm 33.46 in
Head Type	Vision 10AS
Height	69 cm to 171 cm 27.17 in to 67.32 in

IN THE BOX

- [Vision 10AS Pan and Tilt Head](#) (V4046-0001)
- [flowtech®100 MS](#) (V4160-0003)
- [Carry handle flowtech](#) (S2051-1061)
- [Soft Case flowtech75 Systems](#) (V4150-1850)

DATA SHEETS

10AS Balance Chart

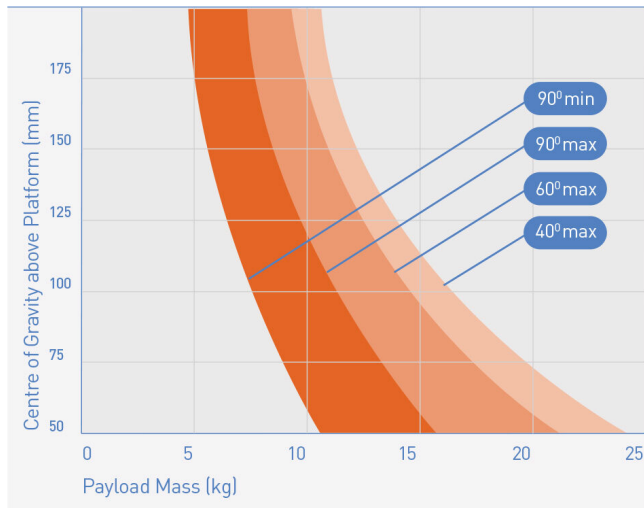

YOU MAY ALSO LIKE...



[System Vision 100
flowtech™100 MS](#)



[System Vision 10AS
flowtech™100 GS](#)