



Vision blue5 2-Stage Aluminium Tripod System with Mid-level Spreader

SKU: VB5-AP2M

The ideal system for 2/3 in. chip
camcorders and accessories

PRODUCT DESCRIPTION

The Vision blue5 camera support system is ideal for uncompromising performance designed and built with the long lasting quality of a Vinten system

The 'infinitely variable' LF drag system delivers silky smooth framing and on-demand whip pan movement, while Vision's perfect balancing system allows total control. The Vision blue5 has the added advantage of an illuminated levelling bubble for quick and convenient set-up.

The Vision blue5 system is available packaged with a two-stage Pozi-Loc tripod, mid-level spreader and a branded soft case.

TECHNICAL SPECIFICATIONS


Range	Vision
Counterbalance	Perfect Balance infinitely adjustable spring balance
Payload	5.8 kg to 12 kg 12.79 lb to 26.46 lb
Material	Aluminium
Weight	6.5 kg 14.33 lb
Drag	LF Drag System
Bowl size	75 mm
Tripod Stages	2
Application	Commercial/Corporate, Documentaries, News
Operating Temperature	-15 °C to 30 °C 5 °F to 86 °F
Interface Compatibility	Ball
Transport Length	85 cm 33.46 in
Head Type	Vision blue5
Height	55 cm to 169.5 cm 21.65 in to 66.73 in

IN THE BOX


- [Vision blue5 Pan and Tilt Head](#) (V4105-0001)
- [2-Stage Aluminium ENG Pozi-Loc Tripod 75 mm](#) (3819-3)
- [Vision blueBridge Camera Accessory](#) (V4106-1003)
- [Mid-level spreader flowtech® 75](#) (V4151-1001)
- [Soft Case flowtech75 Systems](#) (V4150-1850)

DATA SHEETS

8AS Balance Chart

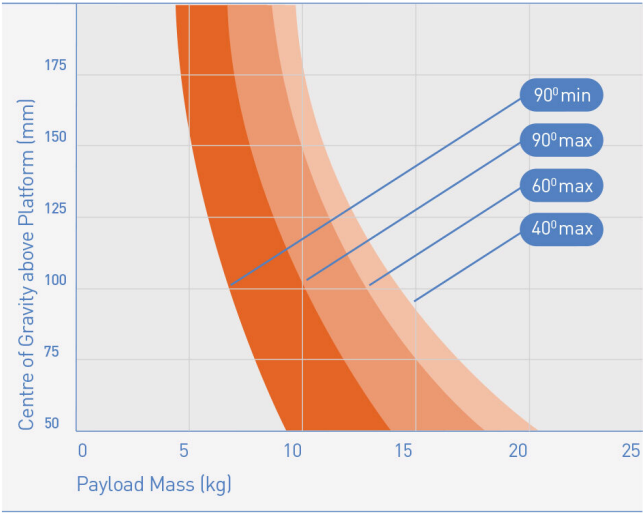

Vision blue5 balance graph

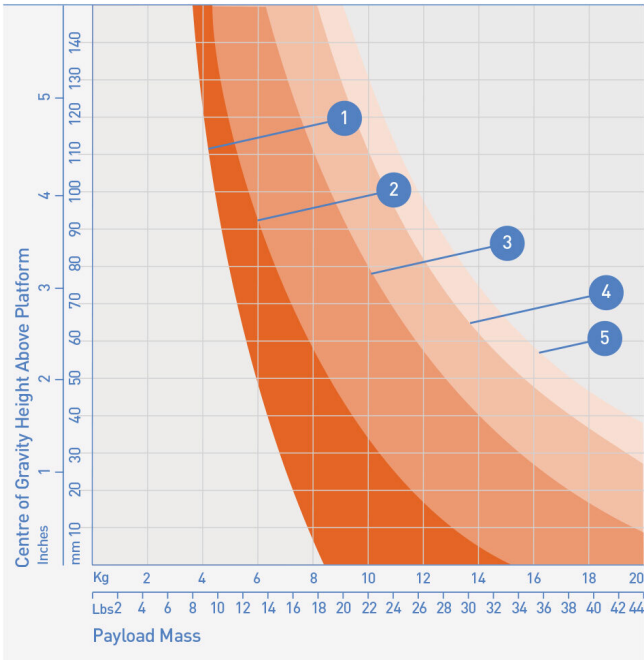

YOU MAY ALSO LIKE...



[System Vision blue5
flowtech75 MS](#)



[Vision 8AS 2-Stage
Aluminium Tripod
System with Ground
Spreader](#)