

**Vinten**

**The Vision blue Range**  
Combining perfect balance with precisely adjustable drag to match your style.

*Freeing your creativity* →

[www.vinten.com](http://www.vinten.com)

Combining perfect balance with precisely adjustable drag to match your style.




[www.vinten.com](http://www.vinten.com)

Vision  
**blue**

Vision  
**blue3**

Vision  
**blue5**



New  
**blueBridge**

## Introducing the new Vision **blue** Range...

The award winning Vision **blue** head and tripod systems deliver effortless support, freeing you to focus on your creative edge. With the widest payload capacity in each class, the perfect balance and drag control can be adapted for cameras from just 1.5kg with the new blueBridge, up to 12kg/26.5lb, for heavier combinations.

Whichever system you choose, each pan and tilt head is effortless to use, providing perfect balance and precisely adjustable drag to exactly match your style.

Based upon the technology used by broadcasters around the globe, Vinten **Vision blue** systems offer outstanding quality of camera support. Each **Vision blue** head is the only product in its class to offer infinitely adjustable Perfect Balance and Lubricated Friction (LF) drag technology, freeing you to focus on getting the best from your camera.

The **Vision blue** range:

**Effortless** camera operation – perfect counterbalance adjustment

**Moves in tune** with you – infinite drag settings

**Built to last** – precision engineered parts, designs based upon broadcast industry expertise

**Adapts to many cameras** - widest payload capacity in each class.

**Vision blue**  
from 1.5kg @55mm CofG

**Vision blue3**  
from 2.1kg @55mm CofG

**Vision blue5**  
up to 12kg (26.5lb) @100mm CofG



# Freedom rewarded...

Freeing you to focus on the filming, the award winning Vision **blue** head and tripod systems deliver effortless support. The sophisticated engineering that delivers Vinten's trademark perfect balance and Lubricated Friction (LF) drag is hidden within a tough metal case, designed to last a life time.

The Vision blue3 is best described as a "don't think, just shoot" tripod head. It feels very natural to work with."

Derran Rootring,  
New Zealand,  
reviewing  
Vision **blue3**

Slideload system  
for rapid camera  
attachment

Infinitely adjustable  
LF drag to match  
your style

Perfect balance  
for effortless  
operation

Illuminated  
levelling bubble  
for precise  
set-up

Silky smooth,  
distraction free,  
operation

The performance of the head is flawless. The usual Vinten silky smooth pan and tilt starts and stops, superb constant velocity movement in any axis and not a hint of pullback at pan ends.

In short, as perfect as I can ever imagine any head being.

Chris Soucy,  
reviewing the  
Vision **blue**

**NABSHOW**  
Where Content Comes to Life™



# In tune with you...

Whichever system you choose, you'll value the perfect balance and infinitely adjustable drag that precisely matches your style:

Designed for the lightest weight  $\frac{1}{4}$ " camcorders and DSLRs, the **Vision blue** delivers the consistent drag and handling resistance that you prefer.


The new **Vision blue3** is ideal for most  $\frac{1}{2}$ " chip camcorders or highly accessorised lightweight DSLRs.

With the **Vision blue5**, you'll value the effortless handling of payloads up to 12kg/26lbs, enough for most  $\frac{2}{3}$ " chip camcorders and accessories.


By teaming the **Vision blue** heads with the Pozi-Loc tripod and Vinten carry case, you'll have the perfect support for your business. The Pozi-Loc's design excellence is felt throughout, starting with the excellent torsional rigidity which minimises the spring back in your film. The smart design and choice of materials ensure it will perform, whatever the conditions.



**Vision blue** balance graph

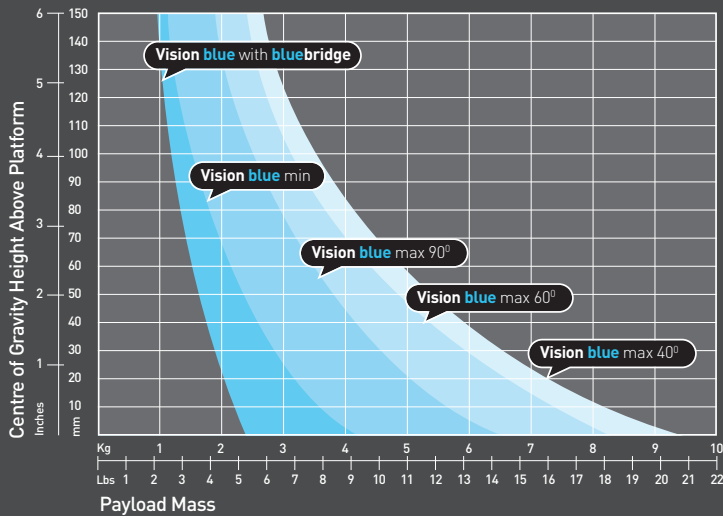

**Vision blue3** balance graph

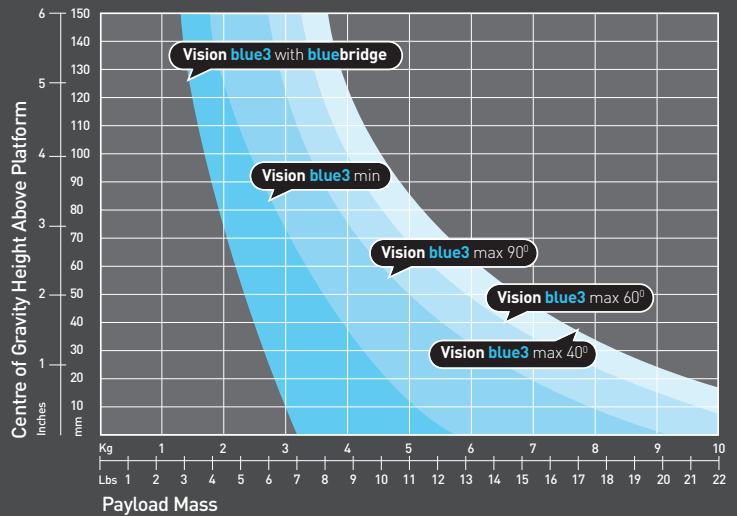

# Bridging the gap...

Vision  
blue

Vision  
blue3

Vision  
blue5


The new Vision blue**bridge** accessory extends the lower range of payloads for each Vision blue system. Quickly and simply attaching to the underside of the camera, it raises the camera above the platform allowing lower weight cameras to be used that would otherwise be too light for the counterbalance system to balance perfectly.



## Why Drag is important

To help you achieve the best possible filming, Vinten's Lubricated Friction (LF) drag technology (resistance to movement) helps prevent overshooting, dampens out unwanted movements and makes minor adjustment virtually impossible to detect.

Vinten's LF drag provides a higher level of resistance at the start of any movement when the most pressure is exerted. Vinten's infinite, rather than stepped adjustment, enables you to select exactly the level of drag to precisely match the way you work.

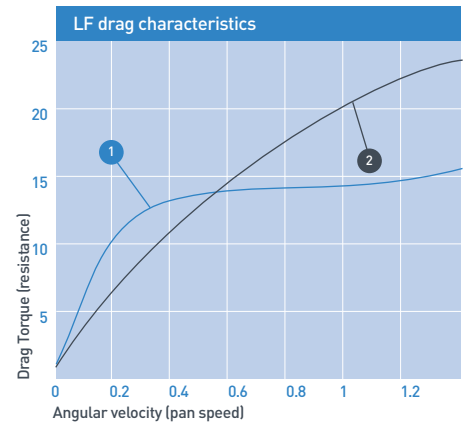


- 1 Vinten drag
- 2 Competitor's drag

"A large knob on the back of the head adds or subtracts spring tension so that (theoretically) a camera can be held in place at any angle of tilt. If you take the time to dial it in, it really works, even with a camera that is within ten percent of the head's maximal load limit."

Bruce A Johnson,  
USA, reviewing the  
Vision blue5



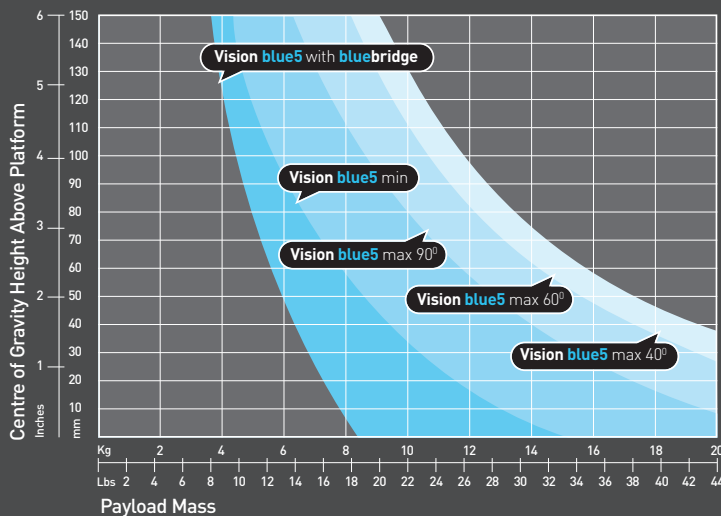











## Vision blue5 balance graph



Every Vinten is backed by our service centres across the world. Register, free, for an extended warranty at [www.vinten.com/servicing-warranty](http://www.vinten.com/servicing-warranty)







## Product specifications & packages

Specification:	Vision blue	Vision blue3	Vision blue5
 Capacity Range	2.1 to 5.0 kg / 4.6 to 11.0 lbs @ approx. 55 mm CofG	3.0 – 6.6kg / 6.6-14.6lbs @ approx. 55mm CofG	5.5-12kg / 12-26lbs @ approx. 100mm CofG
 Capacity Range with <b>Vision blueBridge</b>	1.5 – 5.0kg / 3.3-11.0lbs @ approx. 55mm CofG	2.1 – 6.6kg / 4.6-14.6lbs @ approx. 55mm CofG	4.2-12kg/ 9.2-26lbs @ approx. 100mm CofG
 System height with Pozi-Loc tripod (floor spreader)	55-169cm (22-66")		
 System transport length (floor spreader)	85cm (33.5")		
 Tilt range	±90°		
 Counter balance	Infinitely adjustable Perfect Balance		
 Drag	Calibrated infinitely adjustable LF drag system		
 Ball base	75mm		
 Camera fixing	Standard Vision AS two-way sliding plate with one ¼" camera screw and pin		
 Levelling bubble	Illuminated high contrast blue LED		
 Pan Bar	Single fixed length		
 Temperature range	-15 to +30°C		
 Floor spreader system weight with optional <b>Vision blueBridge</b>	6.9kg/15.2lbs incl. pan bar, camera plate, bowl clamp and <b>Vision blueBridge</b>		
 Mid level spreader system weight with optional <b>Vision blueBridge</b>	6.5kg/14.3lbs incl. pan bar, camera plate, bowl clamp and <b>Vision blueBridge</b>		

### Your Purchase Options

#### Package Options:

 Head only	<b>V4092-0001</b> Stand alone Vision blue head	<b>V4106-0001</b> Stand alone <b>Vision blue3</b> head	<b>V4105-0001</b> Stand alone <b>Vision blue5</b> head
	End entry camera plate supplied with ¼" screw and pin assembly, additional ¼" screw and 2 x ⅜" camera screws, fixed length pan bar, bowl clamp knob and multi-language operator guide.		
 System with floor spreader	<b>VB-AP2F</b> • 1 x <b>Vision blue</b> head (V4092-0001)  • 1 x Two stage aluminium Pozi-Loc tripod (3819-3)	<b>VB3-AP2F</b> • 1 x <b>Vision blue3</b> head (V4106-0001)  • 1 x Floor Spreader (3363-3)	<b>VB5-AP2F</b> • 1 x <b>Vision blue5</b> head (V4105-0001)  • 1 x Soft Case (3358-3)
 System with Mid level spreader	<b>VB-AP2M</b> • 1 x <b>Vision blue</b> head (V4092-0001)  • 1 x Two stage aluminium Pozi-Loc tripod (3819-3)	<b>VB3-AP2M</b> • 1 x <b>Vision blue3</b> head (V4106-0001)  • 1 x LW Mid-Level Spreader (V4032-0001)	<b>VB5-AP2M</b> • 1 x <b>Vision blue5</b> head (V4105-0001)  • 1 x Soft Case (3358-3)
 <b>Vision blueBridge</b> camera adapter	<b>V4106-1003</b> • 1 x Small camera adapter (V4106-2004) • 1 x ¼" screw and pin assy (V4045-1006) • 1A/R Oring (Q001-093)		

#### Changes in Product Specification

Vinten reserve the right to alter specifications or change materials where absolutely necessary. All sizes shown throughout this brochure are approximate and colours shown are as accurate as modern reproduction methods will allow. No liability can be accepted for any variation.

©2013 Videndum plc

®Vinten, Vision, Vector, Quickfix & Quickfit are registered trademarks of Videndum plc.

Quality Systems Approved to ISO 9001:2000  
Certificate No: Q09508

